

Residential Skylights 2024 Catalog

Skylights, Sun Tunnel® Skylights, and Roof Windows

Contents

6 Deck-Mounted Skylights

VSS Solar-Powered

VSE Electric-Powered

VS Manual

FS Fixed

8 Curb-Mounted Skylights

VCS Solar-Powered

VCE Electric-Powered

VCM Manual

FCM Fixed

10 Flat Roof Skylights

GSM Fixed SkyMax

FXG Fixed Double Dome with Acrylic

CFU Fixed Base Unit with ISU CurveTech Cover

CXP Hatch with Polycarbonate Dome Top Cover

12 Self-Flashed Skylights

EVMS Solar-Powered

EV Manual

EF Fixed

QPF Fixed

14 Skylight Shades

Solar-Powered Skylight Shades Manual Roof Window Shades

16 Remote Controls

VELUX Touch

Other Remote Options

18 Roof Windows

GPU Top-Hinged

GGU Center-Pivot

GXU Roof-Access

GDL Balcony

20 Sun Tunnel® Skylights

TGR / TGF Low-Profile Dome

TMR / TMF Pitched Dome

TCR Curb-Mount Dome

TLR Low-Profile Glass **TZRQ** Pan-Flashed Glass

TZR / TZRL Curb-Mount Glass

22 Architectural Skylights

Custom Structural

VMS Modular

24 Flashing & Installation

Flashing Systems
3 Types of Installation
Ceiling Types












The VELUX Skylight Guarantee

Three patented layers of water protection work together to ensure your VELUX skylight will hold up in all weather conditions.

Our skylight warranty is our commitment that VELUX skylights installed with our flashing will stand strong in all types of weather. We're able to make this commitment with a 10-year installation warranty backed by our patented three layers of water protection on deck- and curb-mounted skylights.





Pre-Attached Seal

Pre-attached deck seal (deck-mounted) or gasket (curb-mounted) provides a tight seal for leak-proof installation.

2 Adhesive Underlayment

Adhesive underlayment for secondary water protection against the harshest weather conditions.

Engineered Flashing
Engineered flashing for easy installation and primary
water protection. See page 24 for flashing systems.







Deck-Mounted Skylights

Explore our range of classic deck-mounted skylights, including solar, electric, and manual versions. Deck-mounted skylights attach directly to your roof with no need for a curb, resulting in a quick, seamless, and watertight installation.



Deck-Mounted







Solar-Powered Fresh Air Skylight

- · Powered by a discreet solar panel allowing you to open and close your skylight with the touch of a button without using your home's electricity
- · Equipped with a built-in rain sensor to close the unit in the event of inclement weather



VSE



Electric Fresh Air Skylight

- · Concealed motor and control system easily opens and closes skylight with a remote
- · Equipped with a built-in rain sensor to close the unit in the event of inclement weather



A D E

Manual Fresh Air Skylight

- · Opens and closes by hand with a smooth turning handle for in-reach applications and a rod for out-of-reach ones
- · Choose from a variety of different glasses from impact, white laminated, or snowload



FS



Fixed Skylight

- · Designed to visually expand a space by bringing in an abundance of natural light
- · Choose between a variety of different glasses from impact, white laminated or snowload
- · Clean, low-profile appearance allows this skylight to fit in on any roof

Optional Upgrades: Impact Glass¹ | Snowload Glass² | Copper Cladding³ | Stain Grade Wood Interior⁴

¹ Excluding FS size C12. ² Excluding FS sizes C12, D26, D06. ³ Excluding VSS, VSE size M02. Pre-installed shades not available. ⁴ Excluding VSE. Pre-installed shades not available.

Add the VELUX App Control system, Gateway + App: Control your VELUX shades anytime, anywhere with your smartphone or smart home device. See page 17



B Add the Smart Tech Option: VELUX ACTIVE includes App Control plus smart sensors that continuously monitor temperature, humidity, and CO₂ levels to open or close your skylights automatically. See page 17





💿 Wireless remote included. D Equipped with insect screen. 🗈 10-year installation warranty when installed with VELUX Flashing, see page 5.

Standard Sizes	A06	C01	C04	C06	C08	C12	D26	D06	M02	M04	M06	M08	S01	S06
14°-85° 312-13712														
Rough Opening (W-in.x H-in.)	14 ¹ /2 x 45 ³ /4	21 x 26 ⁷ /8	21 x 37 ⁷ /8	21 x 45 ³ /4	21 x 54 ⁷ /16	21 x 70 ¹ /4	22 ¹ /2 x 22 ¹⁵ /16	22 ¹ /2 x 45 ³ /4	30 ¹ /16 x30	30 ¹ /16 x37 ⁷ /8	30 ¹ /16 x 45 ³ /4	30 ¹ /16x 54 ⁷ /16	44 ¹ /4 x 26 ⁷ /8	44 ¹ /4 x 45 ³ /4
VSS Solar/VSE Electric		•	•	•	•				•	•	•	•	•	•
VS Manual		•	•	•	•				•	•	•	•	•	•
FS Fixed	•	•	•	•	•	•	•	•	•	•	•	•	•	•

VSE not available in M02 size. ◆ Model FS sizes D26 and D06 fit perfectly between roof trusses.



Curb-Mounted Skylights

Enjoy the benefits of fresh air and natural light even if you have a flat or lower pitched roof with our specially designed curb-mounted skylights. This skylight is built like a shoe box with the curb as the box and the skylight as its top, allowing for installation on a wider variety of rooftops.



Curb-Mounted







Solar-Powered Fresh Air Skylight

 Solar-powered battery control system easily opens and closes skylight with remote or smartphone app



VCE
A B C D E

Electric Fresh Air Skylight

- Concealed motor and control system easily opens and closes skylight with a remote
- Rain sensor automatically closes skylight at the first sight of rain







Manual Fresh Air Skylight

- tor and · Manually open and close the skylight with smooth-turning handles or control rods
 - White frames and sashes create a sleek, high quality finish



FCM




Fixed Skylight

- Low profile creates a clean, streamlined appearance on the roof
- Positioning allows for twice the natural light as vertical windows
- · Custom sizes available

Optional Upgrades: Impact Glass¹ | White Laminated Glass² | Triple Pane Glass³

- $^{1} \, \text{Excluding VCE. Excluding FCM sizes 2270, 3055, 4672.} \, ^{2} \, \text{Excluding VCE. VCM sizes 2222, 2246, 4646 only. FCM sizes 1430, 1446, 2230, 3055, 3446, 4672 only.} \, \\$
- ³ Available only for FCM sizes 2222, 2246, 4646.





B Add the Smart Tech Option:
VELUX ACTIVE includes App
Control plus smart sensors
that continuously monitor
temperature, humidity, and
CO₂ levels to open or close your
skylights automatically. See page 17



© Wireless remote included. D Equipped with insect screen. D 10-year installation warranty when installed with VELUX Flashing, see page 5.

Standard Sizes	1430	1446	2222	2230	2234	2246	2270	3030	3046	3055	3434	3446	3737	4622	4630	4646	4672
0°-60° 012-20.12																	
Outside Curb (W-in.x H-in.)										33 ¹ /2 x 58 ¹ /2							
Max Skylight Clearance (W-in.x H-in.)	18 ⁵ /8x 34 ⁵ /8	18 ⁵ /8 x 50 ⁵ /8	26 ⁵ /8x 26 ⁵ /8	26 ⁵ /8 x 34 ⁵ /8	26 ⁵ /8 x 38 ⁵ /8	26 ⁵ /8 x 50 ⁵ /8	26 ⁵ /8 x 74 ⁵ /8	34 ⁵ /8 x 34 ⁵ /8	34 ⁵ /8 x 50 ⁵ /8	34 ⁵ /8 x 59 ⁵ /8	38 ⁵ /8 x 38 ⁵ /8	38 ⁵ /8 x 50 ⁵ /8	41 ⁵ /8 x 41 ⁵ /8	50 ⁵ /8 x 26 ⁵ /8	50 ⁵ /8 x 34 ⁵ /8	50 ⁵ /8 x 50 ⁵ /8	50 ⁵ /8 x 76 ⁵ /8
VCS Solar			•		•	•		•	•		•		•	•	•	•	
VCE Electric			•		•	•		•	•		•					•	
VCM Manual			•		•	•		•	•		•					•	
FCM Fixed	•	•	•	•	•	•	•	•	•	•	•	•				•	•


Shades are not available for FCM sizes 1430, 1446, 3055, 4672.



Flat Roof Skylights


Designed for homes with flat or low-slope roofs, VELUX Flat Roof Skylights transform any space with natural light. The innovative design of these skylights lets in more daylight, easily sheds rainwater, and stands out as a modern addition to roof surfaces.

Flat Roof









Fixed SkyMax Skylight

- · Covers areas up to 35 square feet – 10 feet at the longest dimension
- Solarban® 70XL glass standard, custom glass options available including Hurricane Resistant*
- Standard 2604 powdered coat finish in VELUX Grey with additional designer colors or copper cladding available
- Minimum dimension 17 ½", maximum dimension 120"

Fixed Double Dome Acrylic

- · Curb-mounted model with neutral gray exterior color
- Encapsulated inner frame is 100% thermally broken
- Standard glazing with clear over clear or clear over white acrylic
- Available with bronze over clear glazing and custom sizes*

Fixed CurveTech Glass

- · ISU CurveTech top cover with CurveTech glass lets rainwater easily roll off for a clean look while preventing leaks
- Tempered glass top cover is virtually scratch-proof, providing a durable layer of protection
- CFU fixed base unit with laminated glass for added safety, sound control, and thermal protection
- · Insulated PVC frame

Hatch Polycarbonate Dome

- Opens manually up to 60° for roof access
- Highly impact resistant domed polycarbonate outer cover lets rainwater easily roll off for a clean look while preventing leaks
- Inner laminated glass for added safety, sound control, and thermal protection

11

· Insulated PVC frame

GSM Custom Finish Colors:



VELUX Grey finish standard. Other custom finish colors are available.**

Shades and flashing kits are not available with GSM and FXG models.

Standard Sizes	225225	225465	305305	345345	465465	4896	5199
GSM FXG 1°-60° 1/4:12-20:12 0°-60° 012-20:12							
Outside Curb (W-in.x H-in.)	25 ¹ /2 x 25 ¹ /2	25 ¹ /2 x 49 ¹ /2	33 ¹ /2 x 33 ¹ /2	37 ¹ /2 x 37 ¹ /2	49 ¹ /2 x 49 ¹ /2	48 x 96	51 x 99
Max Skylight Clearance (W-in.x H-in.)	27 ¹ /16 x 27 ¹ /16	27 ¹ /16 x 51 ¹ /16	35 ¹ /16 x 35 ¹ /16	39 ¹ /16 x 39 ¹ /16	51 ¹ /16 x 51 ¹ /16	49 ¼ x 97 ¼	52¼x 100¼
GSM SkyMax Fixed						•	•
FXG Domed Fixed	•	•	•	•	•		

Standard Sizes	060060	080080	090060	120090	120120	090090	100100	150100	150150	200100	090120	100100	120120
0°-15° 012-3:12													
Rough Opening (W-in. x H-in.)	23 ¹¹ /16 x 23 ¹¹ /16	31 ⁹ /16 x 31 ⁹ /16	35 ¹ /2 x 23 ¹¹ /16	47 ⁵ /16 x 35 ¹ /2	47 ⁵ /16 x 47 ⁵ /16	35 ¹ /2 x 35 ¹ /2	39 ⁷ /16 x 39 ⁷ /16	59 ¹ /8 x 39 ⁷ /16	59 ¹ /8 x 59 ¹ /8	78 ³ /4 x 39 ⁷ /16	35 ⁷ /16 x 47 ¹ /4	39 ³ /8 x 39 ³ /8	47 ¹ /4 x 47 ¹ /4
Exterior Frame (W-in.xH-in.)	32 ¹ /16 x 32 ¹ /16	39 ¹⁵ /16 x 39 ¹⁵ /16	43 ⁷ /8 x 32 ¹ /16	55 ¹¹ /16 x 43 ⁷ /8	55 ¹¹ /16 x 55 ¹¹ /16	43 ⁷ /8 x 43 ⁷ /8	47 ¹³ /16 x 47 ¹³ /16	67 ¹ /2 x 47 ¹³ /16	67 ¹ /2 x 67 ¹ /2	87 ³ /16 x 47 ¹³ /16	42 ¹ /2 x 54 ⁵ /16	46 ⁷ /16 x 46 ⁷ /16	54 ⁵ /16 x 54 ⁵ /16
CFU/ISU CurveTech	•	•	•	•	•	•	•	•	•	•			
CXP Domed Hatch											•	•	•

^{*} Call 1-800-888-3589 for information about custom options. ** Visit commercial.veluxusa.com/products/finishes for full list of GSM finish color options.

Page 21



Self-Flashed Skylights

The VELUX product line of self-flashed skylights differ from

both deck- and curb-mounted skylights because their curb

and flashing are built into the skylight and come with a

watertight seal. These skylights are ideal for thin roofing

straight out of the box.

materials like asphalt and shingles and are ready to install

E-Class PVC Flashed



EVMS



Solar-Powered Fresh Air Skylight

- · Solar-powered battery control system easily opens and closes skylight with remote or smartphone app
- · Rain sensor automatically closes skylight at the first sign of rain
- · Easy installation, no sealants or mastic required
- · Available in custom sizes



ΕV



Manual Fresh Air Skylight

- · Manually open and close the skylight with smooth-turning handles or control rods
- · Integrated PVC flashing
- · Easy installation, no sealants or mastic required
- · Available in standard and custom sizes

A D E



EF

- · With no mastic, stepflashing, or sealants, skylight is ready to be installed right out of the box in as little as 30 minutes
- · Larger glass area delivers up to 22% more daylight compared to similar models
- · Available in standard and custom sizes

Metal Flashed



QPF A

Fixed Skylight

- · Clean exterior profile provides natural light and sky views without obstructing the roofline
- · Pre-finished white interior wood frame
- · Pre-installed metal flashing designed for sealant based installation

Optional Upgrades: Impact Glass¹ | White Laminated Glass

¹ Model QPF only.

E-Class Custom Finish Colors:



VELUX Grey finish standard. Other custom finish colors are available.**

Add a pre-installed solar shade: Harness the power of the sun and control the amount of daylight entering through the skylight.* See page 15



Add the VELUX App Control system, Gateway + App:

Control your VELUX shades anytime, anywhere with your smartphone or smart home device. See page 17



📵 Wireless remote included. 💿 Equipped with insect screen. D Available in custom sizes and finish colors. 📵 No sealants or flashing required.

Standard Sizes 2222 2230 2254 3030 3054 4646 2238 2246 3046 E-Class 30 ½ x 30 ½ Rough Opening (RO (W-in. x H-in.) EV/EF E-Class **QPF** Fixed

E-Class Custom Sizes:

EVMS/EV sizing:

· Up to 15 sq ft

· Min RO: 22 1/4" W or H

· Max RO: 48" W or 54" H

EF sizing:

· Up to 23 sq ft

· Min RO: 14 1/2" W or H

· Max RO: 72" W or H

EVMS is available in custom sizes only

^{*} Shades are available for standard sizes only. ** Visit commercial.veluxusa.com/products/finishes for full list of E-Class finish color options.



Solar Skylight Shades & Manual Roof Window Shades

Solar shades add the ultimate functionality to skylights. Sustainably powered by the sun, solar skylight shades give you control over the amount of light in your home. Use the included Wall Switch to easily open and close your shades, or upgrade to our new Intelligent Touch Remote for even smarter operation.

Complete the look of your roof window with stylish, manuallyoperated roof window shades! Available in a variety of styles and colors to match your decor, roof window shades easily glide up and down to let in just the right amount of light for your space.



Solar-Powered Skylight Shades

Available for factory installaion

In-Stock Skylight Shade Options

Room-Darkening, Double-Pleated



Special Order Skylight Shade Options²

Room-Darkening, Double-Pleated



Light Filtering, Single-Pleated



1279 Red Wine

Manual Roof Window Shades

Ships separately from Roof Window

In-Stock Roof Window Shade Options 1

Double Pleated

Room Darkening,

1045

Single Pleated

Light Filtering,

Venetian



7001

Special Order Roof Window Shade Options²

Room-Darkening, Double-Pleated





¹In-Stock: Solar skylight shades available for factory installation, 2-4 business days. Custom sizes must be placed as special order. Manual roof window shades not eligible for factory installation. ² Special Order: No factory installation for special order skylight or roof window shades. Shades ship separately: skylights 14 business days and roof windows up to 8 weeks. 3 GDL requires two shades, one each for top and bottom windows.



Simple control of all VELUX skylights and shades with one remote.

The Touch remote controls both skylights and shades,

featuring ventilation timing and programmable presets.

 \triangle

We believe it should be easier to create your perfect home environment with VELUX skylights and shades. Now, with VELUX Touch, you only need to reach for one remote to take control of every skylight and shade you install. Talk about indoor comfort right at your fingertips!

- · Remote operation in room where your skylights are installed
- · Operate multiple products at once
- · Group skylights and shades to operate together
- · Set the ventilation timer for regular automated home airing
- · Lock home option to securely close all your skylights automatically
- · Preset shade and skylight positions for even easier operation



260







VELUX Touch





VELUX Wall Switch

For customers that want basic and simple benefits, and no smartphone control.

VELUX App Control

For customers that wish for more benefits and smartphone control, without full automation of products.

VELUX ACTIVE

For customers that wish to see insight into air and temperature statistics of their home and improve it through automatic ventilation and heat control.

Price	Included with Product	\$	\$	\$\$
Remote Operation Inside the Room	✓	✓	\checkmark	✓
Remote Operation from Anywhere			✓	✓
Operation of Multiple Products		✓	✓	✓
Requires Wi-Fi Connection			✓	✓
Compatible with Apple HomeKit® and Google Assistant™			√	√
Group Products		✓	✓	✓
Ventilation Timer		✓	✓	✓
Lock Home Option (close all skylights)		✓	✓	✓
Accessible to All Household Members	✓	✓	✓	✓
Scheduling to Personal Preferences			✓	✓
Voice Control			✓	✓
Sensor-based Automation				✓
Use of Weather Data				✓
Live Indoor Sensor Data				✓



Roof Windows

VELUX Roof Windows are installed within reach and manually open to let fresh air flow in while maximizing the amount of natural light in a space. Perfect for loft conversions and attic spaces, roof windows offer panoramic views, natural ventilation, and increased energy efficiency.



Roof Windows

Top-Hinged

reach

closed



· Convenient bottom handle

for simple operation within

· Unique ventilation flap with

built-in reusable air filter

through with the window

· Interior wood frame with

white polyurethane finish

allows fresh, filtered air





- · Innovative top control bar \cdot Convenient and simple to allows for lower installation, operate, even with furniture providing excellent views placed beneath while standing or seated
 - · Easy to open and quick to close with the innovative top control bar
 - · Lower installation allows for more flexibility and better views while standing or seated
 - · Unique ventilation flap allows fresh, filtered air through with the window closed
 - · Interior wood frame with white polyurethane finish

Roof Access

- · Opens wide for easy access to the roof for repairs, maintenance, emergency, and egress
- · Greatly increase the amount of natural light and fresh air in your rooms
- · Sleek outer appearance blends in with your roofline
- · Innovative locking device keeps window open so it won't fall shut
- · Interior wood frame with white polyurethane finish



Balcony

- Easily transforms from roof window to balcony in
- · Provides abundant daylight and great floor-to-ceiling views
- · Unique ventilation flap allows fresh, filtered air through with the window closed
- · Balcony fits flush with the roof when closed for a sleek exterior look
- · Stain grade wood interior



Add Shades!

Roof windows are compatible with VELUX manual shades for ultimate light control.



White Venetian shades stocked. Shades ship separately from Roof Window. Special order colors available, see page 15.

CK02 CK04 CK06 FK04 FK06 FK08 MK04 MK06 MK08 MK10 PK06 PK08 PK10 SK06 SK08 UK04 UK08 PK19 MK19 $\frac{22\sqrt{48}\times 22\sqrt{48}\times 22\sqrt{48}\times 26\sqrt{42}\times 26\sqrt{42}\times 26\sqrt{42}\times 26\sqrt{42}\times 31\sqrt{42}\times 31\sqrt{42}\times 31\sqrt{42}\times 31\sqrt{42}\times 31\sqrt{42}\times 37\sqrt{5}/82\times 37\sqrt{5}/82\times 45\sqrt{3}/82\times 45\sqrt{3}/82\times 53\sqrt{42}\times 53\sqrt{42}\times 33\sqrt{42}\times 33\sqrt{42}\times 31\sqrt{42}\times 31\sqrt{42}\times$ Rough Opening (W-in. x H-in.) **GPU** Top-Hinged GGU Center-Pivot **GXU** Roof-Access **GDL** Balcony

• Satisfies egress requirements - consult local code officials regarding egress requirements as they may vary by jurisdiction.



















Sun Tunnel® Skylights

Adding Sun Tunnel® skylights is a cost-effective way to add natural light to areas that need a brighter, more vibrant appearance. Their low-profile design creates a sleek appearance on any roofline, and their pre-fabricated light tube makes them quick and easy to install. Not to mention, they come with a 20-year tube warranty.



Flat Glass Domed















TGF (flex) / TGR (rigid)

Low-Profile

- · Angled dome is ideal for south-, west-, and eastfacing roofs
- · Parallel design to blend with roofline

TMF (flex) / TMR (rigid) Pitched

- · Raised dome allows for consistent light distribution throughout the day
- · Provides straighter tube run through most roof pitches

Curb-Mount

- · One-piece metal, curb-mounted flashing
- · Ideal for low roof slopes, and tile or metal roofs

TLR Low-Profile

- · Low profile glass design for a sleek appearance
- · Perfect where local ordinances prohibit acrylic domes on roofs

TZRQ Pan-Flashed

- · For shingle roofs
- · Glass options include tempered fireproof diamond wire or laminated hurricane
- TZR / TZRL Curb-Mount
- · For tile or shingle roofs - TZRL includes flashing kit for shingled roofs
- · Glass options include tempered fireproof diamond wire or laminated hurricane

Daylight Controller

21

Accessories:

Ceiling Rings and Frosted Diffusers















Electric Light Kit







Free light. Day or night.



Designed to fit inside the rigid tube of a VELUX Sun Tunnel® skylight, the VELUX Solar Night Light gives off a soft, soothing glow from above when natural light isn't available. The night light's solar panel collects available sunlight, even on cloudy days, to power its rechargeable batteries.

Other Accessories: Diffusion enhancer, additional rigid tube sections and elbows, suspension wire kit, exterior fire band, vapor barrier, flashing kits.

Standard Sizes	TGF		TGR		TMF	TMR		TCR	TLR	TZRQ	TZR	TZRL	
	014	022	010	014	022	014	010	014	014	014	014	014	014
	\bigcirc		0	\bigcirc			0	\bigcirc					
	14° 3:12-	-60° 20:12		14°-60° 3:12-20:12		14°-60° 3:12-20:12	14° 3:12-	-60° 20:12	0°-60° 0:12-20:12	14°-60° 3:12-20:12	10°-60° 2:12-20:12	0°-60° 0:12-20:12	10° - 60° 2:12 - 20:12
Rough Opening – Ceiling (Inches)	15 ¹ /4	22 ³ /4	11 ¹ /4	15 ¹ /4	22 ³ /4	15 ¹ /4	11 ¹ /4	15 ¹ /4	15 ¹ /4	15 ¹ /4	15 ¹ /4	15 ¹ /4	15 ¹ /4
Rough Opening - Roof Deck* (W-in.x H-in.)	14 ¹ /2 x 18	22 ¹ /2 x 26	12 ¹ /2 x 16	14 ¹ /2 x 18	22 ¹ /2 x 26	14 ¹ /2 x 20	12 ¹ /2 x 16	14 ¹ /2 x 20	_	14 ¹ /2 x 17 ³ /4	14 ¹ /2 x 14 ¹ /2	_	14 ¹ /2 x 14 ¹ /2
Outside Curb Dimensions** (W-in.xH-in.)	-	-	-	-	-	_	_	_	20 ⁷ /8 x 20 ⁷ /8	_	-	17 ¹ /2 x 17 ¹ /2	_
Tunnel Length Included with Kit (Feet)	8	8	4	4	4	8	4	4	4	4	4.3	5.3	5.3
Maximum Recommended Install Length (Feet)	8	12	20	30	40	8	20	30	30	30	30	30	30

^{*} Roof deck rough opening height dependent on roof pitch, refer to installation instructions for proper measurement. ** Including roofing materials.

(6) Fireproof tempered diamond wire glass meets Class A Burn Brand Test ASTM E108. (5) Laminated hurricane glass meets Florida Product Approval #6393.





Architectural Skylights

The VELUX line of architectural skylights is made up of lightweight, metal-framed structural skylights available in fully customizable configurations, finish colors, and glazing options.

As part of the architectural line, our modular skylight system can be configured to a range of different daylight solutions while offering several features for climate control, ventilation, and shading.

Custom Structural Skylights













Polygonal Pyramid

Extended Pyramid

Double-Pitch

Low Profile

- · Create spectacular daylighting applications with unlimited design capabilities
- · Lightweight, metal-framed skylights capable of spanning up to 40 feet wide
- · Insulated glass panels help control heat gain and loss in all types of weather
- · Available in a wide variety of highperformance glass and finish colors





MORE INFORMATION



VELUX Modular Skylights - VMS



Longlight



Wall-Mounted Step Longlight Longlight







Step Ridgelight Northlight

- · Prefabricated components ensure a quality build, 100% water tightness, and fast, easy installation
- · Available in a variety of configurations with both venting and fixed modules
- · Includes electronic control system with wind and rain sensor
- · Optional roller blinds are available to control daylight and solar heat gain




Venting Module



Fixed Module






Flashing Systems


Deck-Mounted, Curb-Mounted


VELUX Skylight Flashing Kits are a crucial part of our complete system designed to shed water without relying on sealants that can break down over time. No matter the scope of your project, we offer a variety of skylight flashing systems to ensure a weather-tight fit for virtually all roof types and slopes so you can easily install the skylight of your dreams.


Deck-Mounted Flashing Systems

Each of our deck-mounted flashing systems is made up of a pre-attached deck seal, adhesive underlayment, and engineered flashing. They attach directly to your roof deck and interweave with the roofing material to ensure your skylight will hold up in all weather conditions.
















Curb-Mounted Flashing Systems

VELUX curb-mounted skylights have a pre-attached skylight gasket, which provides a tight seal between the site-built curb and skylight. When combined with our curb-mounted engineered flashing and adhesive underlayment, they create a seal to ensure your skylight will hold up in all weather conditions.







3 Types of Installation

Deck-Mounted, Curb-Mounted, Self-Flashed

When it comes to skylights, there are three different types of installation methods. To know which installation is right for a home, a skylight installer or roofer will evaluate the home's roof pitch, roof material, ceiling type, and whether this is a replacement job or a new cut-in. But whatever the method, you're installing the same great skylight that brings in plenty of natural light and fresh air!

Deck-Mounted Skylights

Deck-mounted skylights allow your skylight to have a low profile on your roof and create an energy-efficient installation. With this installation, your skylight is nailed directly to the roof-deck. Deck-mounted skylights are ideal for new construction homes or for brand new cut-in skylights.



0°-60° 012-2012

Curb-Mounted Skylights

Curb-mounted skylights are the most common installation preference in low-pitch or flat-roof situations. The "curb" is a frame built mostly of two-by-fours that are attached to the roof. The skylight is then installed on top of the curb. You can imagine it as a shoebox: the curb is the box and the skylight is the top.

Self-Flashed Skylights

Self-flashed skylights differ from both deckand curb-mounted skylights because their curb and flashing are built into the skylight. No extra flashing kit is needed. The skylight sits directly over the rough opening in the roof deck and is then sealed.



4


A Skylight for Every Ceiling

Flat, Attic, Cathedral, Vaulted

Have you considered installing a skylight, looked up at your flat ceiling, and thought that there's just no way? You're not alone! One of the most common misconceptions about skylights is that they can only be installed in homes with vaulted ceilings. But we're here to tell you that's not the case.





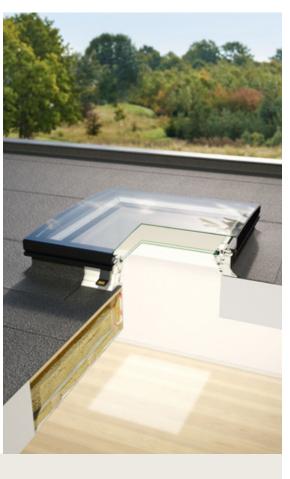

Flat Roof & Ceiling

flat ceilings under

flat roofs can easily

accommodate both

skylights. Depending

on your attic space, a

small light shaft may be

needed to complete the

installation.

Like a cathedral ceiling,

skylights and Sun Tunnel®



Flat Ceiling

If you have flat ceilings, once your skylight is set outside, your installer will construct a drywall light shaft inside. This shaft directs daylight to the room below while hiding the attic space between your ceiling and roof.



Cathedral Ceiling

The advantage to cathedral ceilings during skylight installation is that without attic space between the roof and your home's interior, there's no need for a light shaft. So, once your skylight is installed, the work's all done.



Vaulted Ceiling

Although similar to a cathedral ceiling, vaulted ceilings feature a single sloping slide or arched slope. This style may require a light shaft to be created between your ceiling and roof for the skylight.



Attic

Even if your attic has obstacles like HVAC units, you can still add natural light to your home. Sun Tunnel® Skylights fit between ceiling supports, allowing light to fill the space below uninhibited.

ENERGY STAR®

One of the most straightforward ways to help meet energy codes as a builder or architect, while still designing bright, airy buildings, is to specify ENERGY STAR® certified products.

Many VELUX residential products are ENERGY STAR® certified, which means they meet energy efficiency standards set by the US Environmental Protection Agency (EPA). In order to be ENERGY STAR® certified, fenestration products must have their U-factor, Visible Transmittance, and Solar Heat Gain Coefficient ratings independently tested and approved under the FenStarSM Certification Program of the National Fenestration Rating Council (NFRC) to qualify.

By using ENERGY STAR® certified products, architects and builders can use skylights to bring much needed daylight and fresh air inside, allowing them to create more attractive buildings and more livable spaces while still meeting local energy codes.

In warmer climates, there is great potential for lighting energy savings by using emerging control technologies like VELUX ACTIVE or more effective daylighting products like VELUX skylights with shades and Sun Tunnel® skylights.

- To qualify for the VELUX 10-year installation warranty, VELUX flashing must be purchased. The 10-year installation warranty excludes EVMS, EV, QPF, EF, GSM, FXG, CFU, CXP.
- VELUX shades are not available for any VELUX custom-sized skylights. VELUX shades when purchased with a standard size accessory tray are available for select E-Class skylights.
- Consult local code officials regarding egress requirements as they may vary by jurisdiction.

Code Compliance

VELUX offers a broad array of skylights, roof windows, and Sun Tunnel® skylights that meet the applicable performance requirements and testing and labeling standards written into the most current US Model Codes:

- · 2021 IBC (International Building Code)
- · 2021 IRC (International Residential Code), and
- · 2021 IECC (International Energy Conservation Code),
- · As well as local and regional codes based on the above codes.

Additionally, electrical components built into VELUX products are UL listed.

Standard VELUX residential skylights and Sun Tunnel® products meet the current and prior North American Fenestration Standards (NAFS), also known as AAMA/WDMA/CSA 101/I.S.2/A440. Copper-clad versions may not exceed these requirements but do meet other standards required of them.

To verify these attainments on-site, the products are shipped with all required labels to expedite the inspection and final acceptance process. VELUX confidently certifies through these labels that only products consistent with the tested specimens are sent to the job.

Warranty

For over 80 years, VELUX has been dedicated to producing skylights that are synonymous with quality and reliability. Our commitment to you does not end once your skylight is installed.

The VELUX deck- and curb-mounted product family carries a 10-year installation warranty when installed with VELUX flashing, plus 20 years on glass seal failure, 10 years on product, and 5 years on shades and controls.

MORE INFORMATION




The 10-year installation warranty does not apply to VELUX products purchased prior to January 1, 2010. Other exclusions apply, see full warranty for details.

Testing Data

VELUX rigorously tests the materials of our skylights so you can rest assured that the products installed in your home are safe.

For our most up-to-date data, visit: veluxusa.com/testing-data

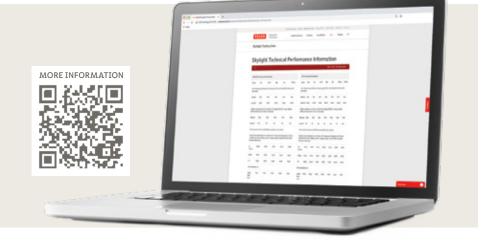

 $NOTICE: ALL\ GLASS\ MAY\ BE\ SUBJECT\ TO\ UNEXPECTED\ AND\ SPONTANEOUS\ BREAKAGE\ in\ rare\ circumstances\ due\ to\ imperfections\ in\ the\ glass\ that\ are\ undetectable\ during\ the\ manufacturing\ and\ inspection\ process\ by\ the\ manufacturer\ of\ the\ glass\ and\ VELUX.$

VELUX offers the choice of laminated or tempered glass skylights. Impact glass and comfort plus glass are all types of laminated glass. Comfort glass is a type of tempered glass. Laminated glass is a combination of two or more glass sheets with one or more interlayers of plastic (PVB) or resin. In case of breakage, the interlayer is designed to hold the fragments together. Tempered glass does not contain an interlayer to hold the fragments together. Instead, tempered glass is designed to break into small, pebble-like pieces. When tempered glass breaks, pieces of glass come loose and may strike an individual.

CONSULT LOCAL REGULATIONS AND/OR BUILDING MATERIAL CONSULTANTS TO DETERMINE WHICH TYPE OF GLASS IS RIGHT FOR YOU OR IF LAMINATED GLASS IS REQUIRED IN YOUR APPLICATION.

All VELUX skylights, roof windows, Sun Tunnel® skylights, flashing kits and shades must be purchased through a qualified VELUX dealer. Please see the "Where To Buy" section of veluxusa.com website for a list of VELUX dealers near you.

Transforming spaces since 1941. For over 80 years, VELUX has helped people envision and achieve the transformation of spaces using daylight and fresh air through the roof. Our product program includes skylights, Sun Tunnel® skylights, decorative shades and roof windows, as well as installation and smart home solutions. By creating brighter, healthier, more sustainable places to live, work, learn, and play we enable a better everyday life for people around the world. We work globally with sales and manufacturing operations in more than 40 countries and around 11,500 employees worldwide. The VELUX Group is owned by VKR Holding A/S, a limited company wholly owned by non-profit, charitable foundations (THE VELUX FOUNDATIONS) and family. For more information, visit veluxus a.com.

XUS 2028-3-0724 - © 2024 VELUX Group. VELUX Group. VELUX Group. VELUX Group. VELUX Group. B a trademarks. VELUX Sun Tunnel® is a trademarks. VELUX Group. © 2021 - 2023 Wanner Bros. Discovery, Inc. or its subsidiaries and affiliates. All trademarks are the property of their respective owners. All rights reserved.

Transforming spaces since 1941. For over 80 years, VELUX has helped people envision and achieve the transformation of spaces using daylight and fresh air through the roof. Our product program includes skylights, Sun Tunnel® skylights, decorative shades and roof windows, as well as installation and smart home solutions. By creating brighter, healthier, more sustainable places to live, work, learn, and play we enable a better everyday life for people around the world. We work globally with sales and manufacturing operations in more than 40 countries and around 11,500 employees worldwide. The VELUX Group is owned by VKR Holding A/S, a limited company wholly owned by non-profit, charitable foundations (THE VELUX FOUNDATIONS) and family.

For more information, visit veluxusa.com.

VELUX America LLC 215 Puckett Ferry Road PO Box 5001 Greenwood, SC 29648-5001

1-800-888-3589

veluxusa.com whyskylights.com